Defender HD

Via Cavolto, 10 22040 Anzano del Parco (Co) Ph. +39 031 33521 Fax +39 031 3352138



www.nuovadefim.com

VAT. 03046230987


DEFENDER is the ideal solution to protect construction sites, special events areas and more generally any locations where temporary demarcation is necessary. The patented joint used between the horizontal and vertical tubes, ensures new standards in terms of strength and durability, thanks also to the special ribbed profile. The system is manufactured according to the CEE 92/57 D.L.494/96 D.L. 528/99 norm.


APPLICATIONS

PRODUCT SPECIFICATIONS

- > Building worksites
- > Quick storage
- > Work in progress areas
- > Sports events
- > Trade fairs

DEFENDER HD is a working site temporary fence made by a ribbed pregalvanized tubular frame 38mm diameter welded with s/s AISI 307 Si wire to prevent oxidation and a mesh panel infill. The welded mesh has 3.4 mm diameter horizontal wires at 254 mm centres and 2.8 mm diameter vertical wires at 101.6 mm centres galvanized according to the UNI EN 10244-2 norm. The 600x235x130mm cement base, are provided with eight holes to suit the vertical panel profiles.

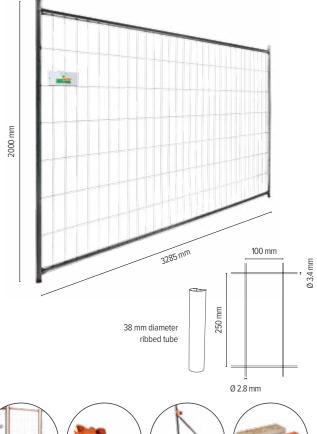



> see page 66

 PANEL
 MESH
 TUBE
 BASE

 H
 L
 Weight
 H
 L
 Ø
 Weight

 mm
 mm
 kg/ea
 mm
 mm
 mm
 kg/ea

 2000
 3285
 14
 250
 100
 38 Ribbed
 38



DEFENDER ACCESSORIES P. 66

with 38 mm holes