

TALIA® / SCREEN / TALIALIVE

With its many variants, the range of TALIA® fencing is the ideal solution to meet the aesthetic requirements of both new projects and the growing demand for the renovation of new building structures. The elegant linear profile blends harmoniously with all settings, from the most modern hi-tech solution to that in tune with nature. All this is possible thanks to the wide offer of finish available (hot-dip galvanized and painted) and the materials used. Among these, NUOVA DEFIM ORSOGRIL offers the exclusive TALIALIVE, which combines the unique style of TALIA® with the properties of COR-TEN steel, such as warm and "live" colours, no need of maintenance, an advantage that is particularly appreciated for installations at height altitude.

The TALIA® profile is available in the STANDARD and SCREEN versions to meet different shielding requirements. The panels are installed in collaboration with the technical office, using either standard products, or custom solutions for specific projects. The lack of surface finish in the TALIALIVE version speeds up delivery times and makes it possible to make on-site corrections, without compromising aesthetics.

TECHNICAL DETAILS

Dimensions

- > Mesh 46x132 mm
- > TALIA® and TALIA® SCREEN horizontal/vertical profiles
- > Vertical/horizontal round bars Ø 4 mm

Material


- > S235JR UNI EN 10025 steel
- > COR-TEN steel S355 JOWP

Coating

- > Hot-dip galvanizing according to UNI EN ISO 1461
- > Polyester powder coating
- > Possible oxidation aid by pickling (COR-TEN)


PRODUCT SPECIFICATIONS

Wall cladding system consisting of S235JR slatted steel or COR-TEN steel, 46x132 mesh size, welded to 4 mm diameter vertical round bars.

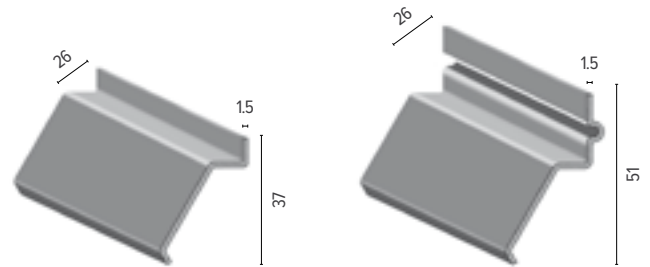

TALIA® profile

TALIA® SCREEN profile

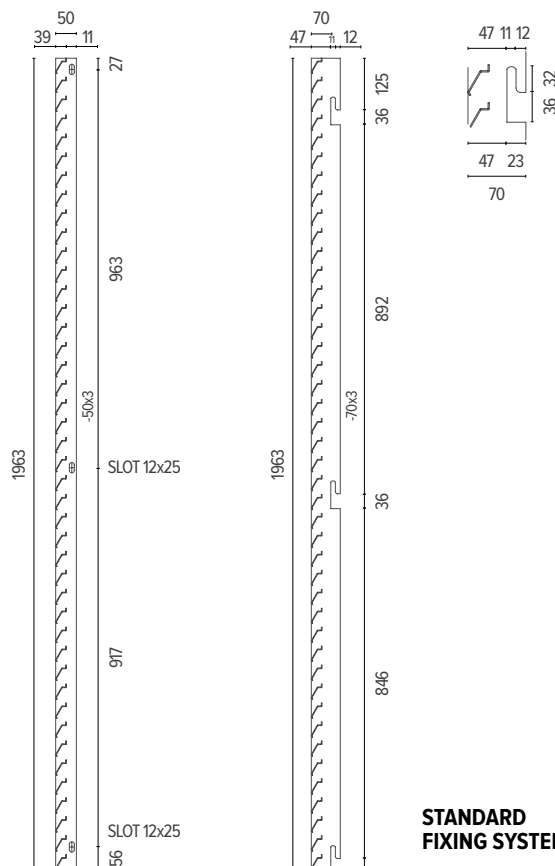


STANDARD
FIXING SYSTEMS




COR-TEN steel TALIALIVE wall cladding





POSTS
P. 58



ASSEMBLY SYSTEMS
P. 61